




# S-TRACK

## 3-Phasen-Einbauschiene DALI

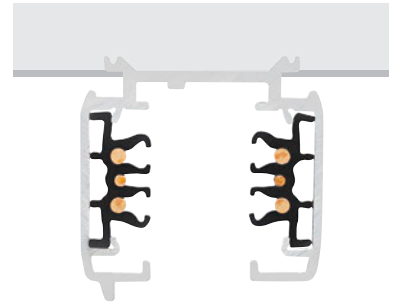

	1 m	1 m	2 m	2 m
Nennspannung (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
max. Stromstärke (A)	16	16	16	16
max. mech. Belastung	30 kg	30 kg	30 kg	30 kg
Farbe	● schwarz	○ weiß	● schwarz	○ weiß
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x B x H (cm)	100 x 5,6 x 3,2	100 x 5,6 x 3,2	200 x 5,6 x 3,2	200 x 5,6 x 3,2
Art.Nr.	1006511 ●	1006512 ●	1006513 ●	1006514 ●
EUR	53,00	53,00	96,00	96,00
	3 m	3 m	4 m	4 m
Nennspannung (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
max. Stromstärke (A)	16	16	16	16
max. mech. Belastung	30 kg	30 kg	30 kg	30 kg
Farbe	● schwarz	○ weiß	● schwarz	○ weiß
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x B x H (cm)	300 x 5,6 x 3,2	300 x 5,6 x 3,2	400 x 5,6 x 3,2	400 x 5,6 x 3,2
Art.Nr.	1006515 ●	1006516 ●	1006517 ●	1006518 ●
EUR	137,00	137,00	217,00	217,00