


# MAP 0.6/0.9

INSTALLATION INSTRUCTIONS | MAY 2022

## With ground housing

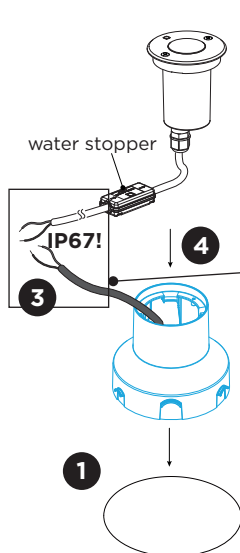

**Do not cut off or open the water stopper on the cable.**

### Included:

waterproof connectors:




### Optional:


IP68 connection box:

order ref. 73240706 = 2 WAYS 2x1,5 Ø6-8mm

Cut an opening in the ground housing to easier guide the cable sideways.

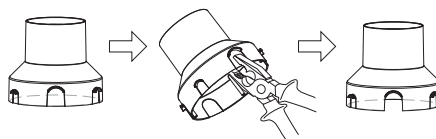

## DIMENSIONS




MAP 0.6

MAP 0.9

## MOUNTING INSTRUCTION WITH GROUND HOUSING


- 1 Make a hole in the ground according to the prescribed dimensions (of the ground housing).
- 2 Drainage: we recommend that all exterior groundspots should be installed with a drainage level even when using a recessed housing.




## POWER CONNECTION

- 3 Connect to 220-240V and use waterproof connections.
- 4 For MAP 0.9: Use screws to attach the fixture to the ground housing, screws are included.  
For MAP 0.6: It can be pushed in and is self-supporting.

## optional ground housing



90012201  
for MAP 0.6




90012202  
for MAP 0.9

# MAP 0.6/0.9


INSTALLATION INSTRUCTIONS | MAY 2022

## Without ground housing

A. Attached to the floor (or wall, for wall mounting).

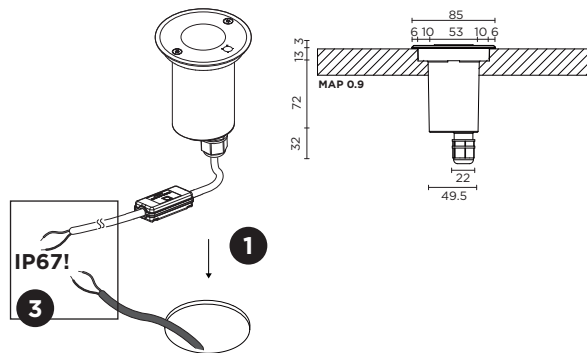

B. Rests on the stainless steel borders of the fixture.

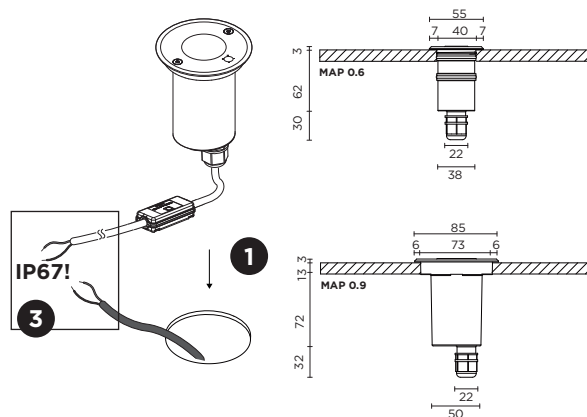


## MOUNTING INSTRUCTION WITHOUT GROUND HOUSING

A. Attached to the floor (or wall, for wall mounting).



- 4 Use the screws (included) to attach the luminaire to the floor or wall. Make sure to measure correctly so that you can screw into a hard material.

This type of installation is not possible for MAP 0.6.




B. Rests on the stainless steel borders of the fixture.

- 4 Place the luminaire into the hole. No tool is needed to fix the luminaire as it will rest on the stainless steel frame.




Note:  
the bolts and  
nuts can be used  
for filling the  
screwholes.



# MAP 0.6/0.9

INSTALLATION INSTRUCTIONS | MAY 2022

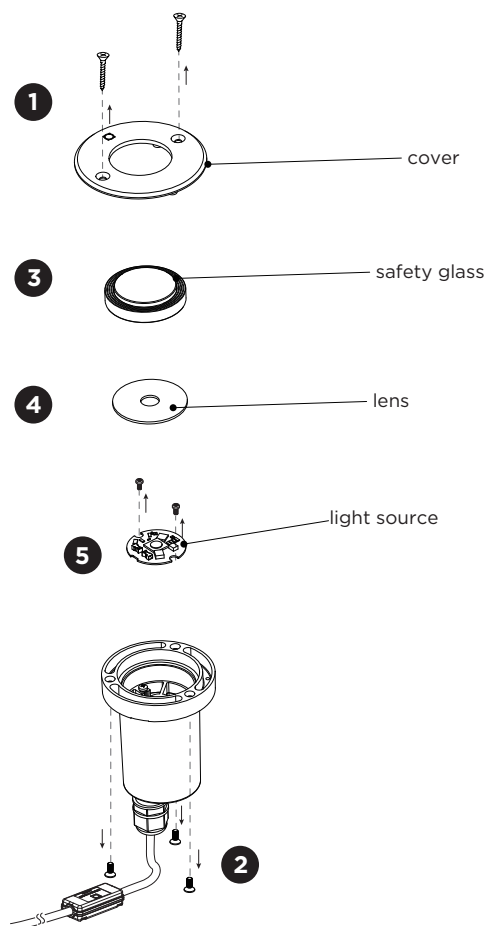


## DISMOUNTING INSTRUCTION

### light source

- 1 Remove the screws and take out the fixture.
- 2 Remove the screws below and remove the cover.
- 3 Remove the safety glass.
- 4 Remove the lens.
- 5 Remove the screws, disconnect the wires and remove the light source.

To replace the light source please contact your Wever & Ducré customer service contact point.



This luminaire contains a light source with the energy class F.

